

ARTIFEX


ASSEMBLY GUIDE



FANBACK COUNTER GLIDER


WHAT'S INCLUDED:

- (8) 1/4" x 3" Wafer Head Bolts
- (2) 1/4" x 2 1/2" Wafer Head Bolts
- (10) 1/4" Flange Nut
- (2) 1/4" x 2 1/2" Wafer Head Lags
- (4) 5/16" x 2 1/2" Wafer Head Bolts
- (4) 5/16" Flange Nut
- (8) 5/16" Lock Nut
- (4) Glider Arms
- (1) 5/32 Allen Wrench

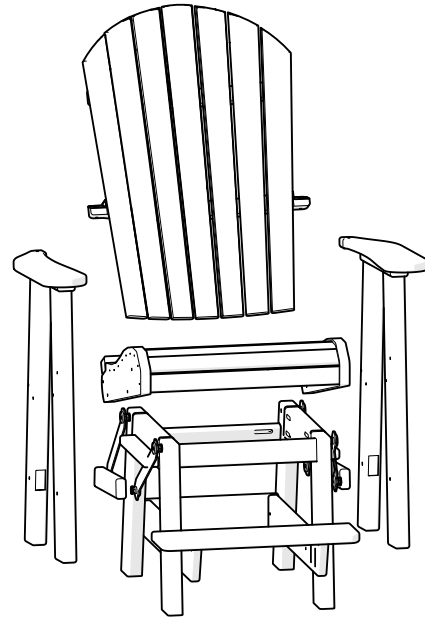

1 INSTALL LEGS ONTO THE SEAT


Attach the leg to the Seat
(Indicated by Yellow Arrow)
Use four 1/4" x 3" wafer head
bolts and four 1/4" flange
nuts to attach the left legs to
the seat (as indicated by Red
Arrows) Then, repeat for the
right legs.

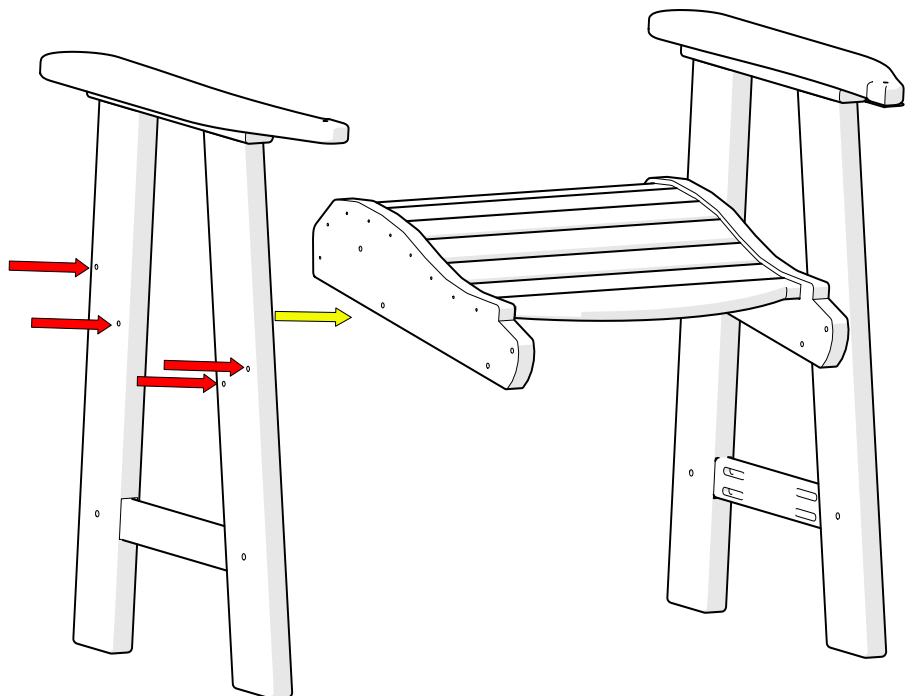

2

ATTACH BACK TO SEAT AND LEGS

Use two 1/4" wafer head bolts and two 1/4" flange nuts to attach the middle brace of the back to the arms (short arrows), then use two 1/4" x 2 1/2" wafer head lags to attach the bottom brace of the back to the seat (long arrows).

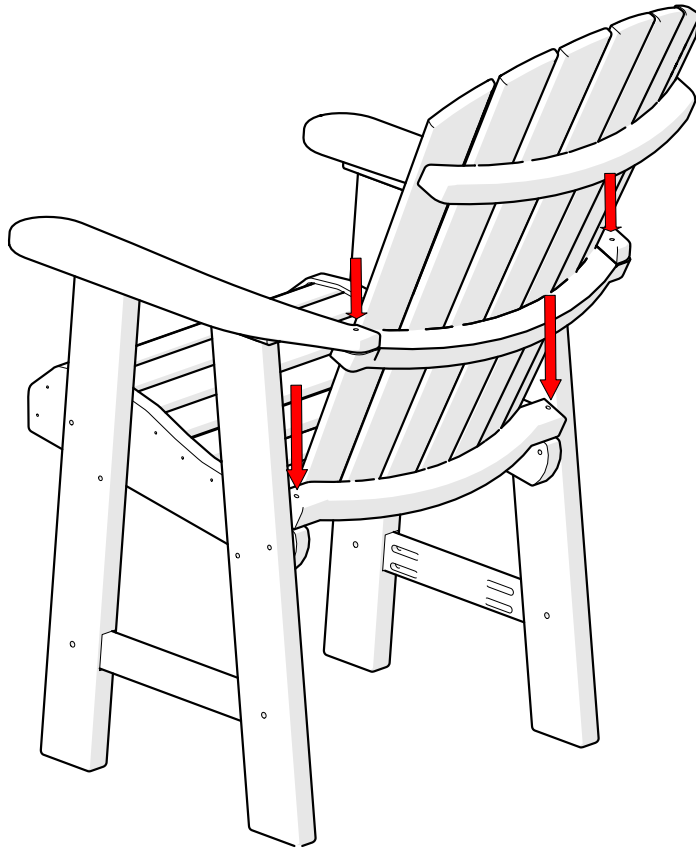


3

INSTALL BOLTS ONTO LEGS

Install (2) 5/16" x 2 1/2" wafer head bolts into the right leg, then tighten them to the leg with (2) 5/16" flange nuts.


Repeat on the Left leg.

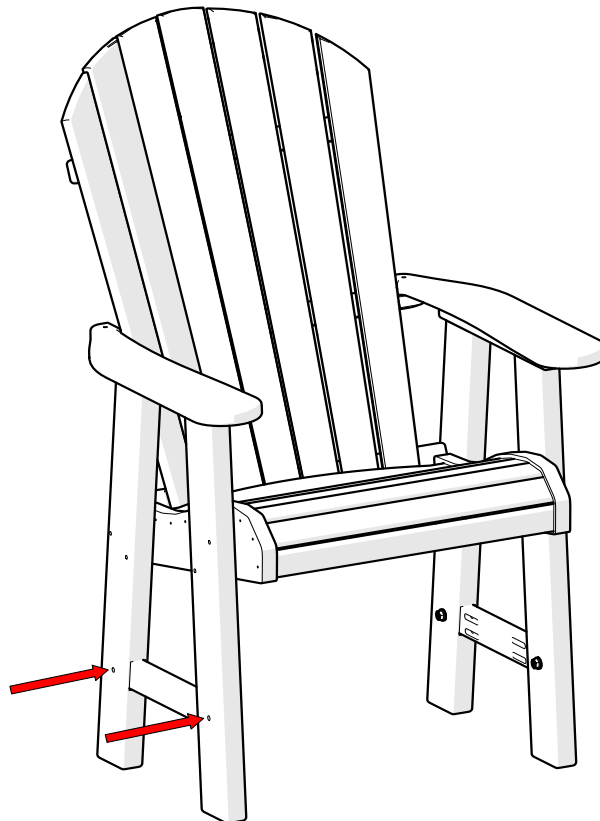

ARTIFEX

4 ATTACH GLIDER ARMS TO BASE

Using four 5/16" flange nuts, attach four glider arms to the base.

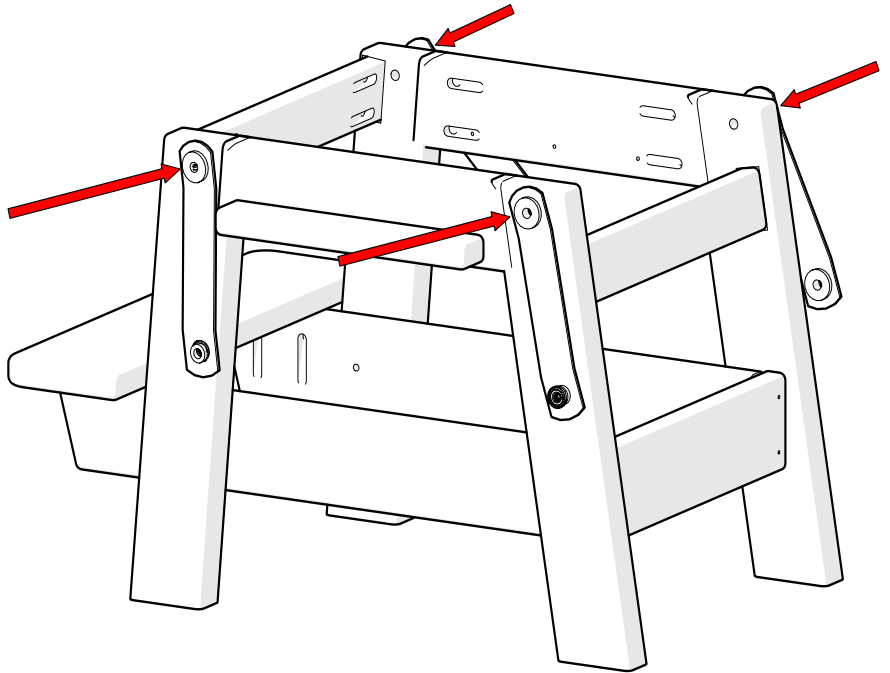

5 ATTACH CHAIR TOP TO BASE

Using four 5/16" flange nuts, attach the glider chair top to the glider chair base

