



Tools Required	
#2 Square Drive Bit (not Included)	
$\frac{5}{32}$ " Allen Key ( Included)	
For Burner Assembly Tools. See page 8 in the burner Manual	



Fire Table Parts List			
1	A	Left End Panel with Control Panel	
1	B	Front Panel with Door	
1	C	Backside Panel	
1	D	Right End Panel	
1	E	Top	
1	F	Floor	
48	G	2" Stainless Steel Screws	
6	H	$\frac{5}{16}$ "X1 $\frac{1}{2}$ "Stainless Steel Wafer Bolt	




## Assembly Instructions

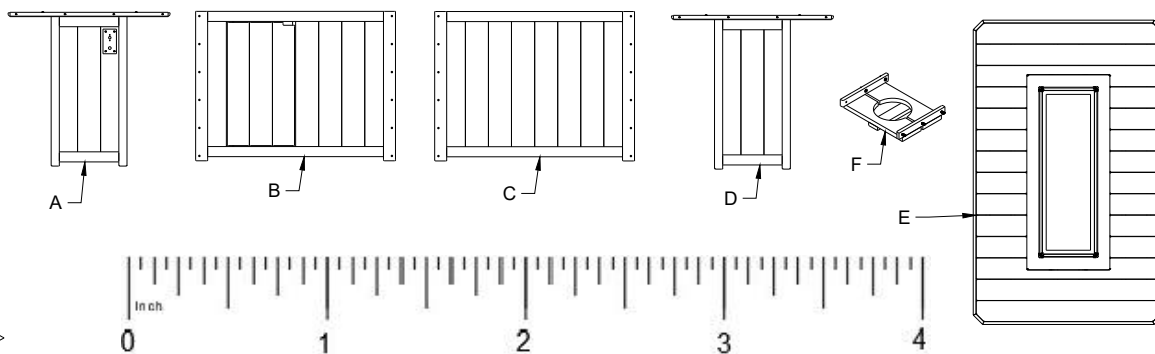


1. Choose a flat surface to assemble your furniture.
2. Attach (C) Backside Panel to (A) & (D) End Panels using 12-(G) 2" Screws in the predrilled holes.

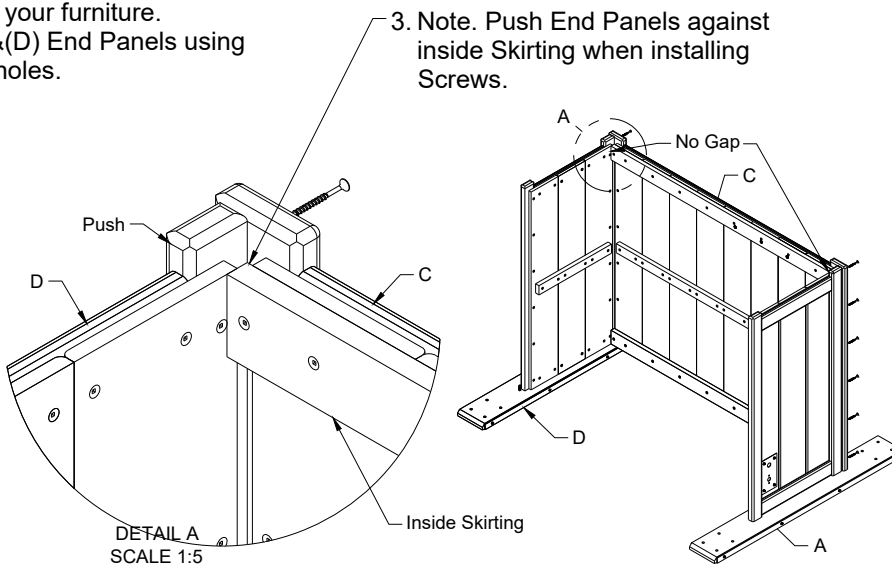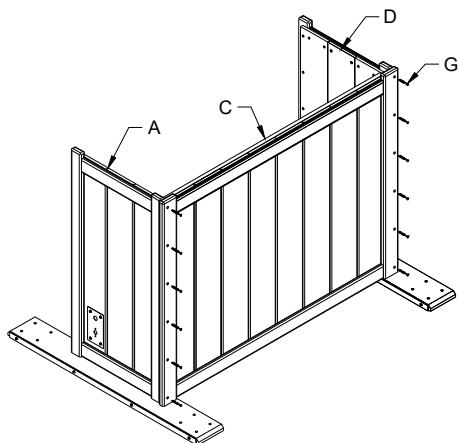



4. Attach 1 side of the (F) Floor to backside using 3-(H)  $\frac{5}{16}$ "X1  $\frac{1}{2}$ " Wafer Bolts.

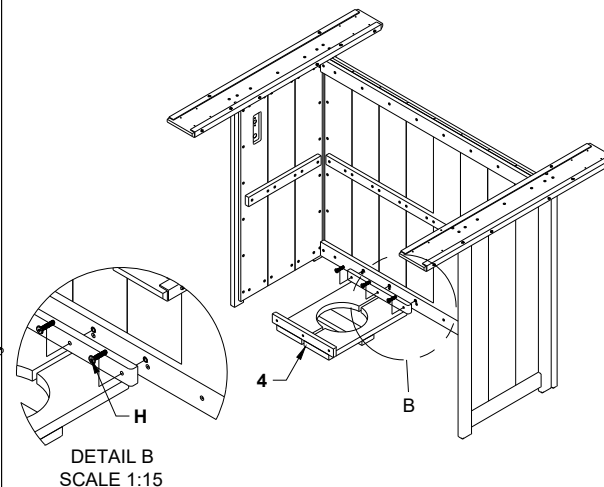

5. Attach (B) Front Panel with the Door to (A) & (D) End panels using 12-(G) 2" Screws in predrilled holes.

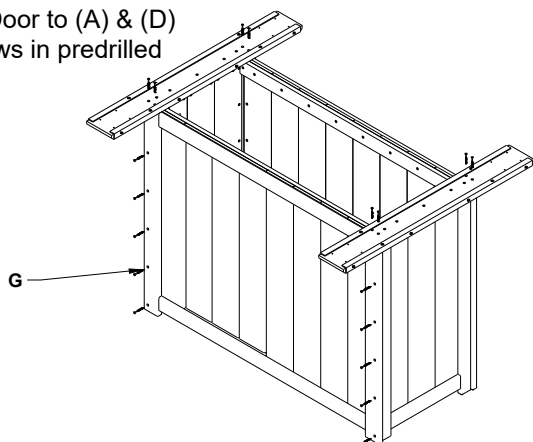

6. Attach Front Side of (F) Floor to (B) Front Side Panel using 3-(H)  $\frac{5}{16}$ "X1  $\frac{1}{2}$ " Wafer Bolts.

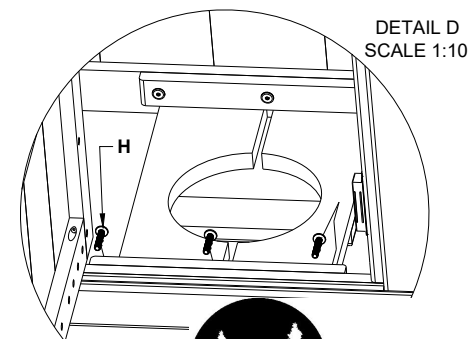


Lumin Fire Table 79" Rectangular Bar Height




## Assembly Instructions

7. Install 8-(G) 2" Screws in predrilled holes in Top Supporting Cross Pieces .

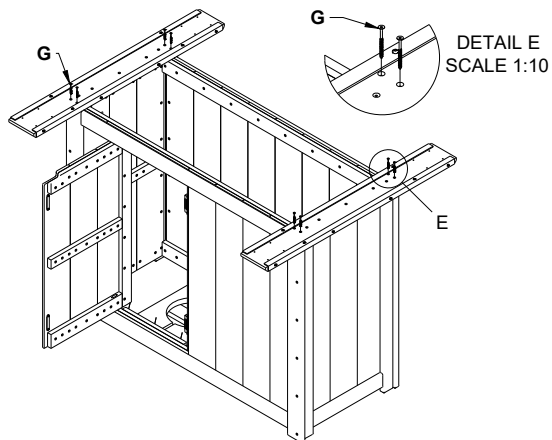

8. Position (E) Top on assembled Base, align with marks on Top. Attach Top using 16-(G) 2" Screws in predrilled holes.

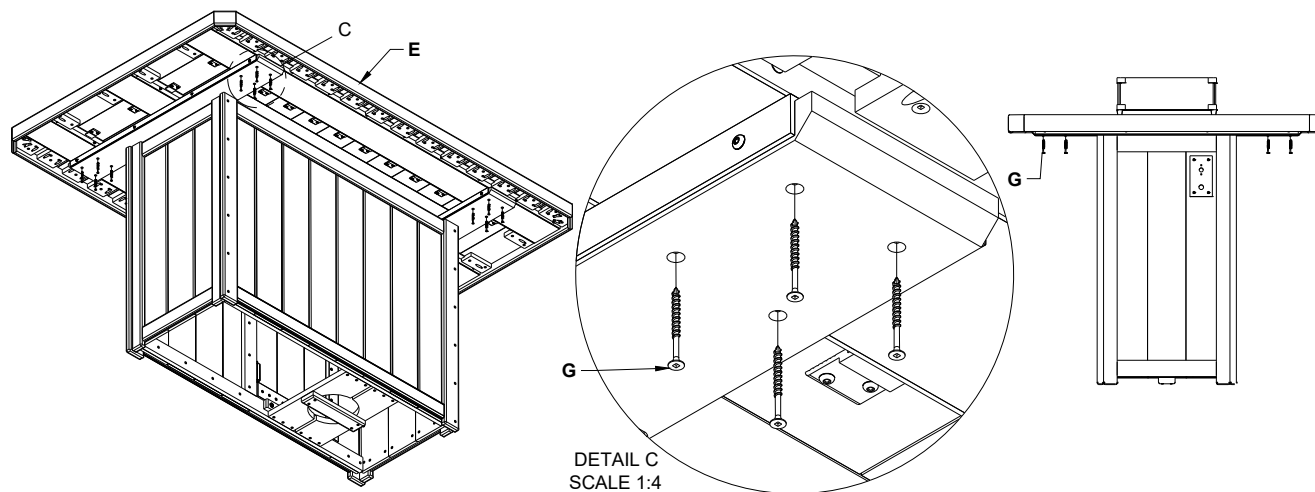

9. Read, Understand and follow "Burner Instruction Manual" for safe operation.

10. Follow instructions in "Burner Installation Section" starting on page 6 in the manual. Get someone to help attach Igniter, and Burner Control, to the Control Plate.

11. Assemble Wind Guard. "Always keep Wind Guard in place with lighted burner"!!!!!!

